


Brondell®

Swash DR801 Advanced Bidet Toilet Seat with Side Arm Control

Models: DR801-EW, DR801-RW

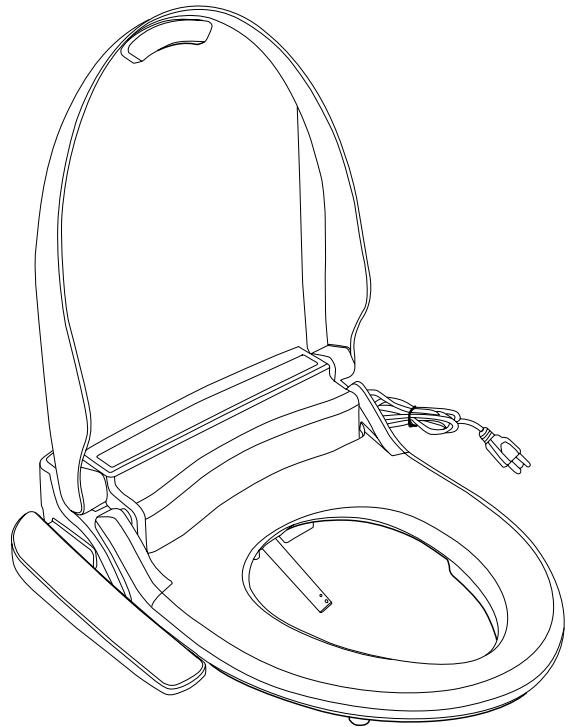

Features

- Hybrid Water Heating System
- Fully Adjustable Water Temperature and Pressure
- Heated Seat with 3 Temperature Levels
- Replaceable Carbon Deodorizer
- Warm Air Dryer with 5 Temperature Levels
- LED Nightlight with On/Off Option
- Self-Cleaning, Stainless Steel Nozzle
- 5 Adjustable Nozzle Positions
- Nozzle Oscillation, Gentle, and Strong Wash Modes
- Side-Arm Control Panel
- 1-Year Limited Warranty

Technical Specifications

Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	870 W
Power Cord Length	46.80" / 118.87 cm
Rated Power Source	120 V
Seat Weight Limit	330 lb / 149.69 kg
Lid Weight Limit	160 lb / 72.57 kg
Deodorizer Filter Type / Filter Life	Activated carbon / 12 months



NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

Brondell®
Feels better already.

Brondell, Inc.
PO Box 470085
San Francisco, CA 94147
brondell.com

Brondell®

Weight and Dimensions	
Dimensions (L x W x H)	Elongated: 18.5" x 20.7" x 5.7" / 46.99 cm x 52.58 cm x 14.48 cm Round: 18.5" x 19.5" x 5.7" / 46.99 cm x 49.53 cm x 14.48 cm
Seat Thickness	1.4" / 3.56 cm
Bidet Hose Length	15.75" / 40 cm
Bidet Hose Connection Size	1/2" x 1/2"
T-Valve Connection Size	7/8" x 7/8" x 1/2"
Weight	Elongated: 11.90 lb / 5.34 kg Round: 11.46 lb / 5.20 kg

Warm Water Washing Device	
Supply Water Pressure	9.95 - 106.7 psi / 0.07 - 0.74 MPa
Incoming Water Temperature	37.4°F-104°F / 3°C-40°C
Flow Rate	Rear Wash: Max 0.21 gal/min / 0.8 L/min Front Wash: Max 0.18 gal/min / 0.7 L/min
Default Cycle Time	2 minutes
Water Pressure Control	5 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 91.4°F/33°C; Medium - 96.8°F/36°C; High - 102.2°F/39°C
Max Heater Power Consumption	800 W
Safety Devices	Thermal fuse, Thermostat, Water level sensor, Bi-metal

Heated Seat and Air Dryer	
Seat Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F/34°C; Medium - 100.4°F/38°C; High - 107.6°F/42°C
Max Seat Heater Power Consumption	55 W
Number of Dryer Settings	5 levels
Default Dryer Cycle Time	2 minutes
Safety Devices	Thermal fuse, Thermostat, Thermal sensor, Bi-metal

Get the right fit.

A. Center of bolt holes to front of toilet bowl

Elongated: 18"-19.5" / 45.7 cm-49.5 cm
Round: 16"-17.75" / 40.6 cm-45.1 cm

B. The distance from the center of the bolt holes to the toilet tank must be at least 1.5" / 3.81 cm.

If the distance is less than 1.5 inches, the seat may extend slightly over the front edge of your toilet bowl.

C. Distance between bolt holes

All models: 5.5"-8.0" / 13.97 cm-20.32 cm

D. Measure the distance from the front of the toilet tank to the front of the toilet bowl

If this measurement is 20" / 50.8 cm inches or more, purchase an elongated seat.
If this measurement is less than 20" / 50.8 cm, purchase a round seat.

